Deklin Technologies

CL2400 24VDC Accessory Socket

Style:	Lighter Socket
Rating:	24V, 10A
Materials:	Plastic parts are high-temperature, glass-filled nylon with a temperature index of 125°C. Metal current carrying parts are .032" copper alloy for maximum conductivity and nickel plated for maximum corrosion protection.
Terminals:	.250" quick connect tabs.
Mounting:	Provision for two mounting means. Front mount Rear mount—with non-metallic locknut.
Construction:	Provided with plastic alloy cap to seal receptacle when not in use.

Dimensions:

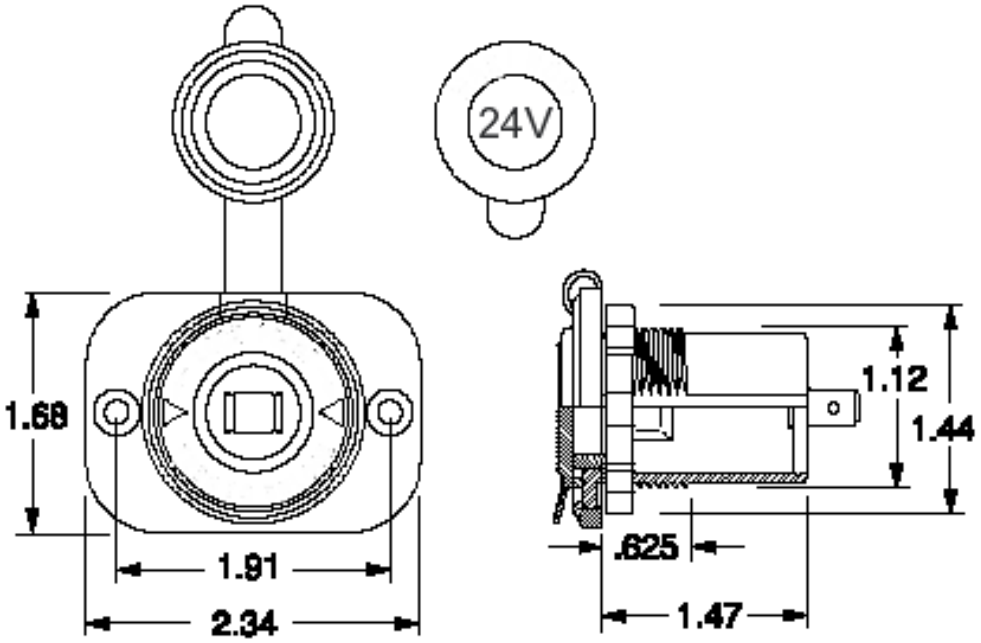

413 Chesterfield Lane, North Aurora, IL 60542 Tel: 630-844-1760 Fax: 630-844-1795