


# Current Limiters & Holder, Lacing Cord

## Current Limiters & Holder

ANL Low Voltage limiter isolates faults in equipment. The ANL comes with a silver-plated copper link. The link element is visible thru a mica window and has a 600 amp interrupting rating.

P/N 4164

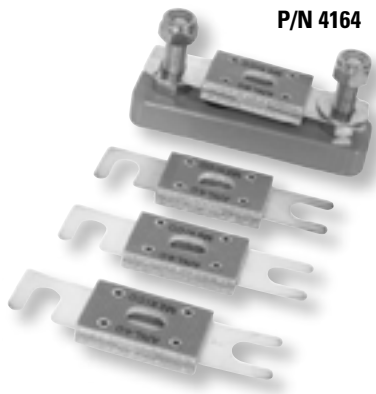

P/N	AMP
ANL35	35
ANL40	40
ANL50	50
ANL60	60
ANL80	80
ANL100	100
ANL125	125
ANL130	130
ANL150	150
ANL175	175
ANL200	200
ANL225	225
ANL250	250
ANL275	275
ANL300	300
ANL325	325
ANL350	350
ANL500	500

## Lacing Cord

This braided nylon lacing cord meets MIL-T-43435B, Type 1, Size 3, Finish B. The cord is covered in micro-crystalline wax with a melting point above 55°C/130°F. Cord comes in 500 yd rolls and is available in black or white.

P/N	Color	Width
LCB	Black	.085
LCW	White	.085



Install Supplies

Current Limiters & Holder, Lacing Cord



1965

1975

