

TRUE BLUE POWER®

A division of Mid-Continent Instrument Co., Inc.

PRO

True Blue Charger PRO

TT28-12

Distributed by Mid-Continent Instrument Co., Inc.

Charge, discharge and evaluate True Blue Power lithium-ion aircraft batteries with the intelligent and easy-to-use TT28-12 **True Blue Charger PRO**.



TT28-12

The **ONLY** battery charger to automatically discharge lithium-ion aircraft batteries to 30% state-of-charge, as required for air shipment.

The True Blue Charger PRO is pre-loaded with all charge and discharge parameters for True Blue Power lithium-ion batteries, allowing maintenance personnel to safely and efficiently top charge batteries and perform scheduled capacity checks.

Product features

COMPATIBILITY	Specifically engineered to charge, discharge and test True Blue Power lithium-ion aircraft batteries: TB17 17 amp-hour TB20 20 amp-hour TB30 30 amp-hour TB40 40 amp-hour TB44 46 amp-hour TB60 60 amp-hour
VARIABLE POWER	12.5 amps charge (nominal) 60 amps discharge (maximum)
DISPLAY	Alphanumeric LCD display provides battery mode, current, voltage, temperature and timer
LED INDICATION	Charge, Discharge, Fault
AUDIBLE ALERTS	Low voltage, temperature and reverse polarity
WARRANTY	One-year limited

From the world leader of
certified lithium-ion aircraft batteries

Kansas

9400 East 34th Street North
Wichita, Kansas 67226 USA
Tel 316.630.0101 800.821.1212
Fax 316.630.0723
tbp@mcico.com

California

16320 Stagg Street
Van Nuys, California 91406 USA
Tel 818.786.0300 800.345.7599
Fax 818.786.2734
tbp@mcico.com


truebluepowerusa.com



True Blue Charger PRO

TT28-12

Distributed by Mid-Continent Instrument Co., Inc.

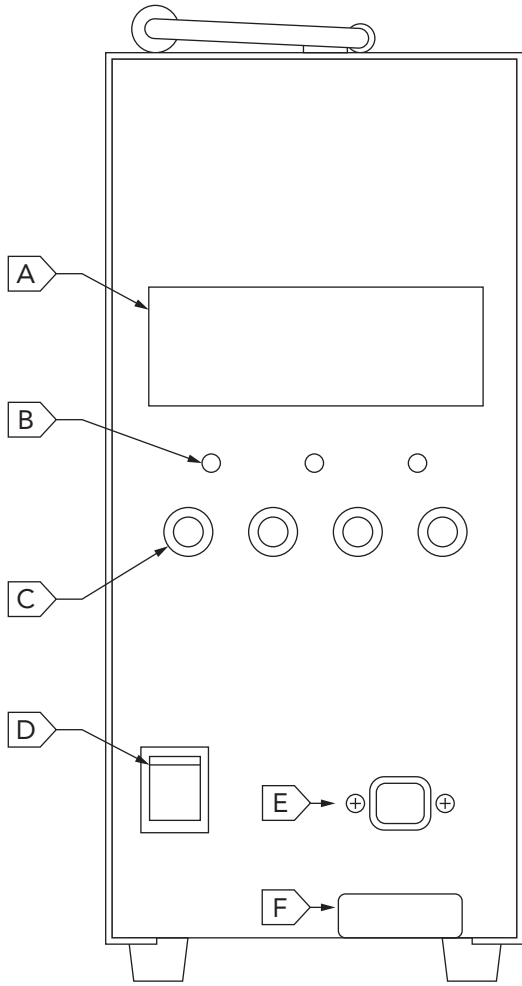

- A Display
- B Indicators
- C Control Pushbuttons
- D Power Switch
- E Temp Connector
- F Battery Connectors

Technical specifications

INPUT VOLTAGE	90 – 132 VAC or 180 – 264 VAC (switch selected) 47 – 63 Hz
INPUT POWER	8.4A at 115 VAC 4.35A at 23 VAC 15A Circuit Breaker
BATTERY CHARGE VOLTAGE	Lithium-ion; 28.8V (maximum)
OPERATING TEMPERATURE	0°C to +55°C (32°F to 131°F)
STORAGE TEMPERATURE	-40°C to +80°C (-40°F to +176°F)
DISPLAY MEASUREMENT	To 0.1 volts, 0.1 amps
DATA ACCURACY	±0.2 volts, ±0.2 amps
WEIGHT	29.5 lbs (13.4 kg)
DIMENSIONS	6.5" W x 14.5" H x 15" D
BATTERY CONNECTORS	Compatible with MS-3509, 5/16" ring terminals, alligator clamps and temperature cables
PROTECTION AND MONITORING	Overcharge, over-temperature and time out for failed batteries, auto shut off after top charge is complete and audible alerts for low voltage and reverse polarity